


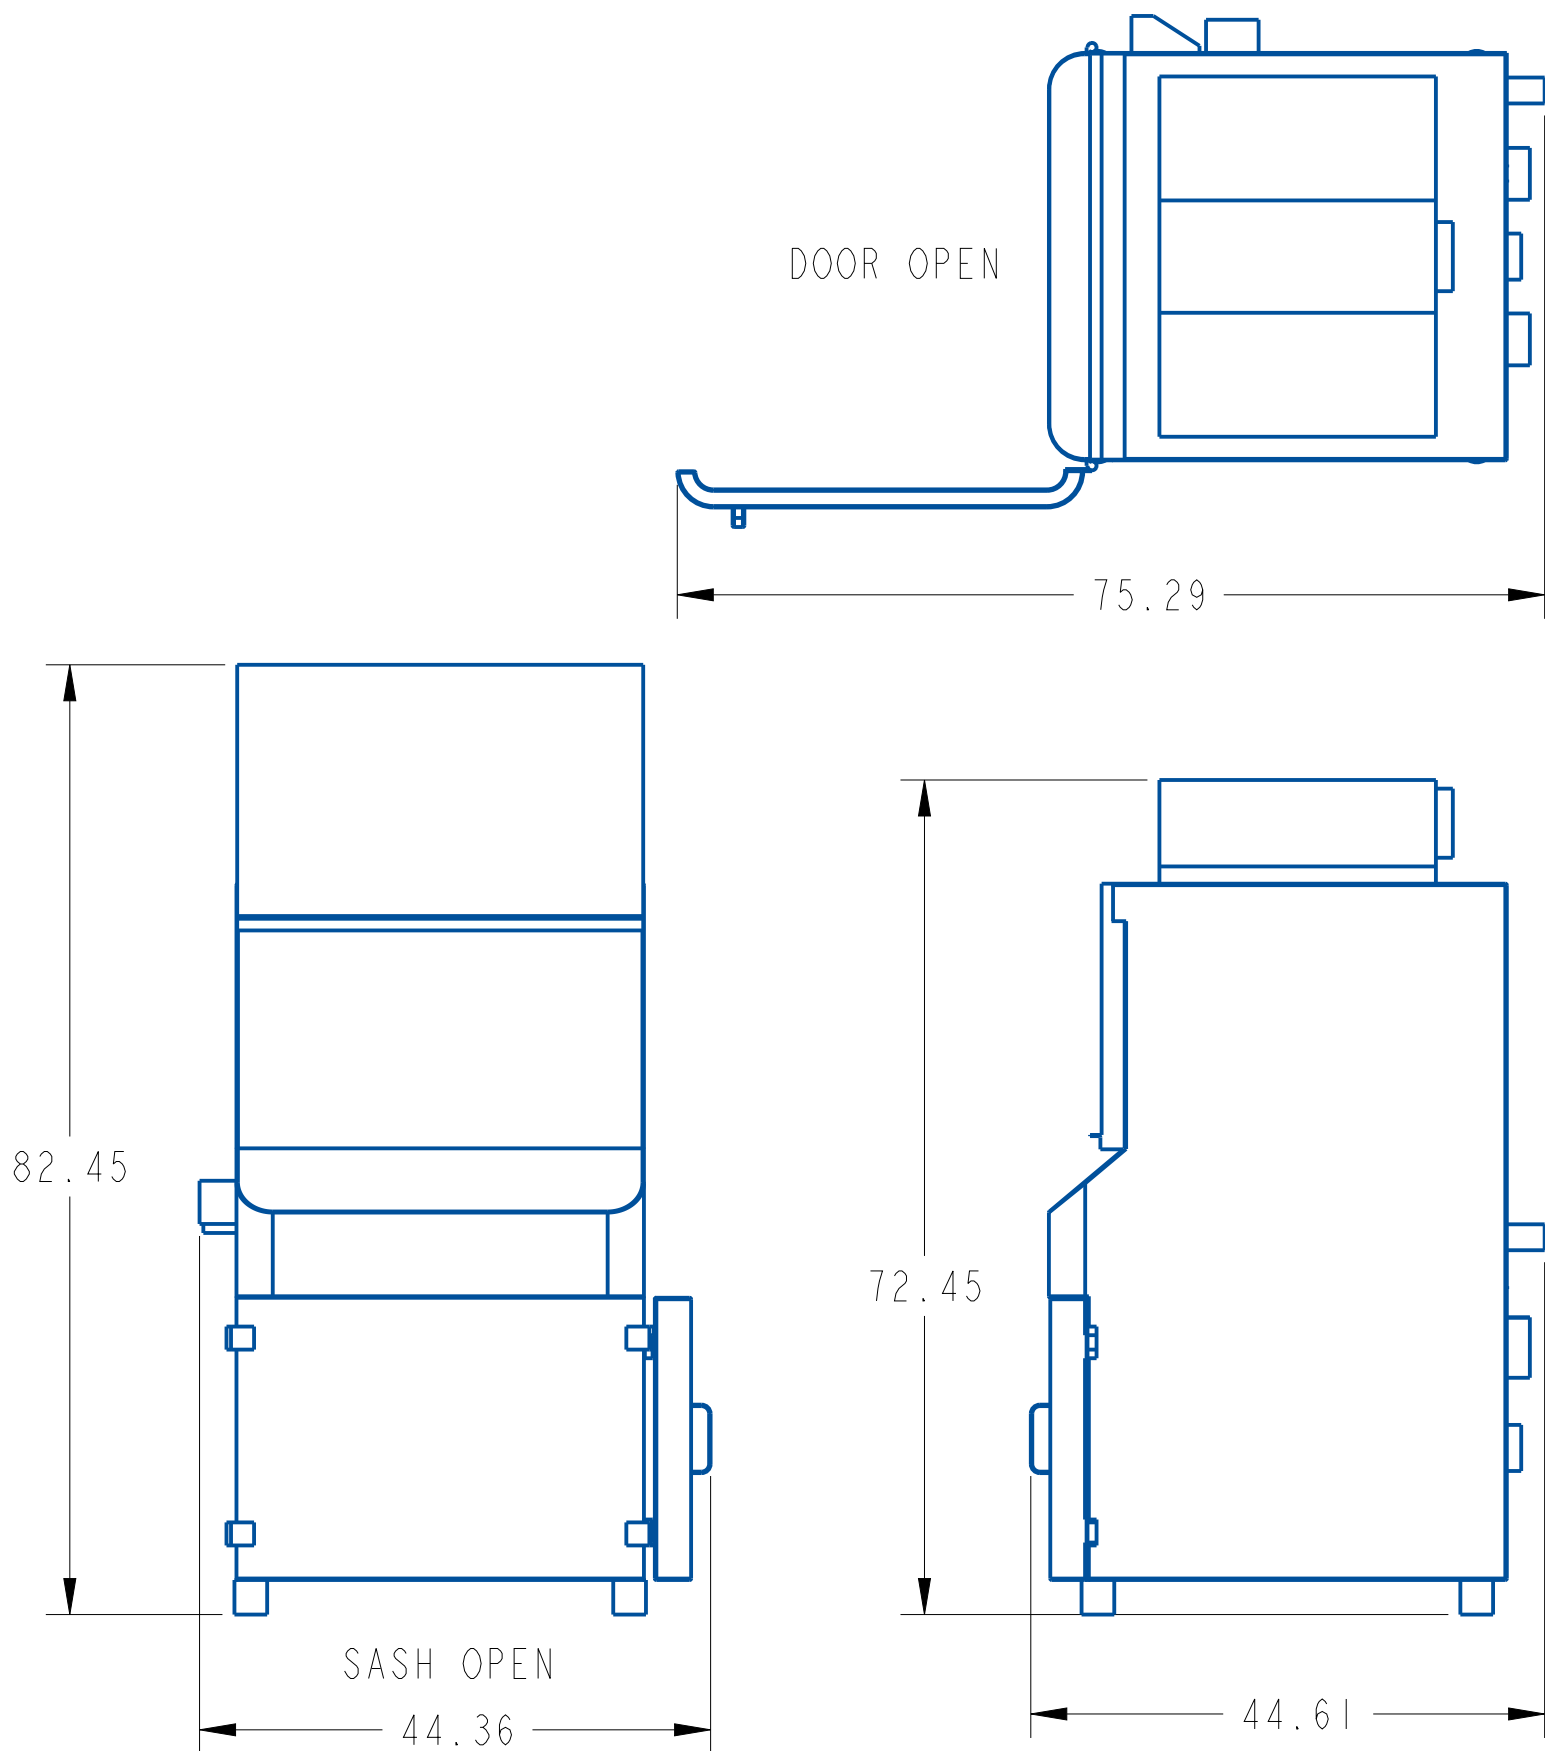

#### REQUIRED UTILITIES:

ELECTRICAL: 208-230VAC 50/60 HZ SINGLE PHASE, 26.2A MAX  
VACUUM\*: 20" HG(33kPa) -1/4" PTC OR 1/4" FNPT


*\*(NOT REQUIRED IF PURCHASED WITH VACUUM PUMPS)*

N2/CDA: 70 psi(482kPa)-1/4" PTC OR 1/4" FNPT

HOOD EXHAUST: 6" OD-0.4" H<sub>2</sub>O @ 540CFM (100Pa @ 917CMH)

CABINET EXHAUST: 4" OD-0.4" H<sub>2</sub>O @ 20CFM (100Pa @ 34CMH)

NOTE: EACH MODULE WILL HAVE ITS OWN EXHAUST REQUIREMENTS

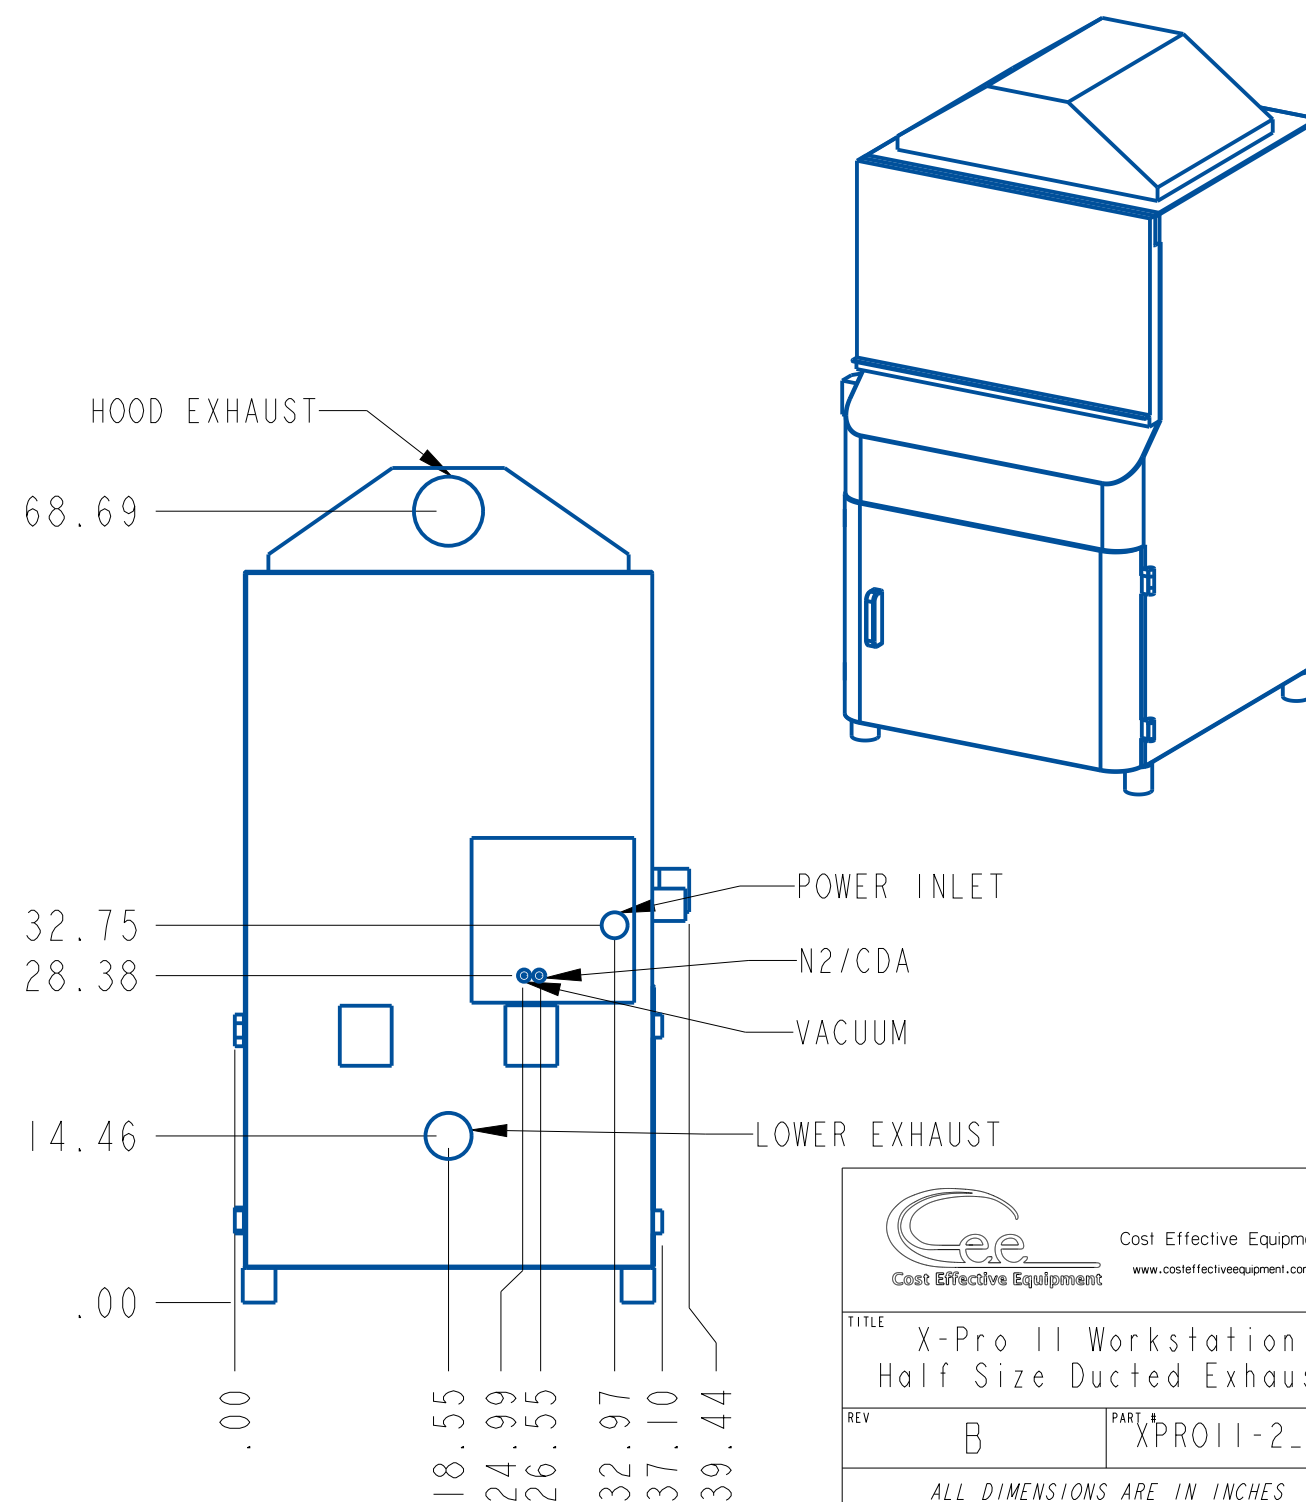

|                                                                                                                   |  |                                                                                                                |  |
|-------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------|--|
| <br>Cost Effective Equipment |  | Cost Effective Equipment<br><a href="http://www.costeffectievequipment.com">www.costeffectievequipment.com</a> |  |
| TITLE<br>X-Pro II Workstation<br>Half Size Ducted Exhaust                                                         |  |                                                                                                                |  |
| REV<br>B                                                                                                          |  | PART #<br>XPROII-2_DE                                                                                          |  |
| ALL DIMENSIONS ARE IN INCHES                                                                                      |  |                                                                                                                |  |