

REQUIRED UTILITIES:






ELECTRICAL: 208-230VAC 50/60 HZ SINGLE PHASE, 26.2A MAX
VACUUM*: 20" HG(33kPa) -1/4" PTC OR 1/4" FNPT

**(NOT REQUIRED IF PURCHASED WITH VACUUM PUMPS)*

N2/CDA: 70 psi(482kPa)-1/4" PTC OR 1/4" FNPT

CABINET EXHAUST: 4" OD-0.4" H2O @ 20CFM (100Pa @ 34CMH)

NOTE: EACH MODULE WILL HAVE ITS OWN EXHAUST REQUIREMENTS

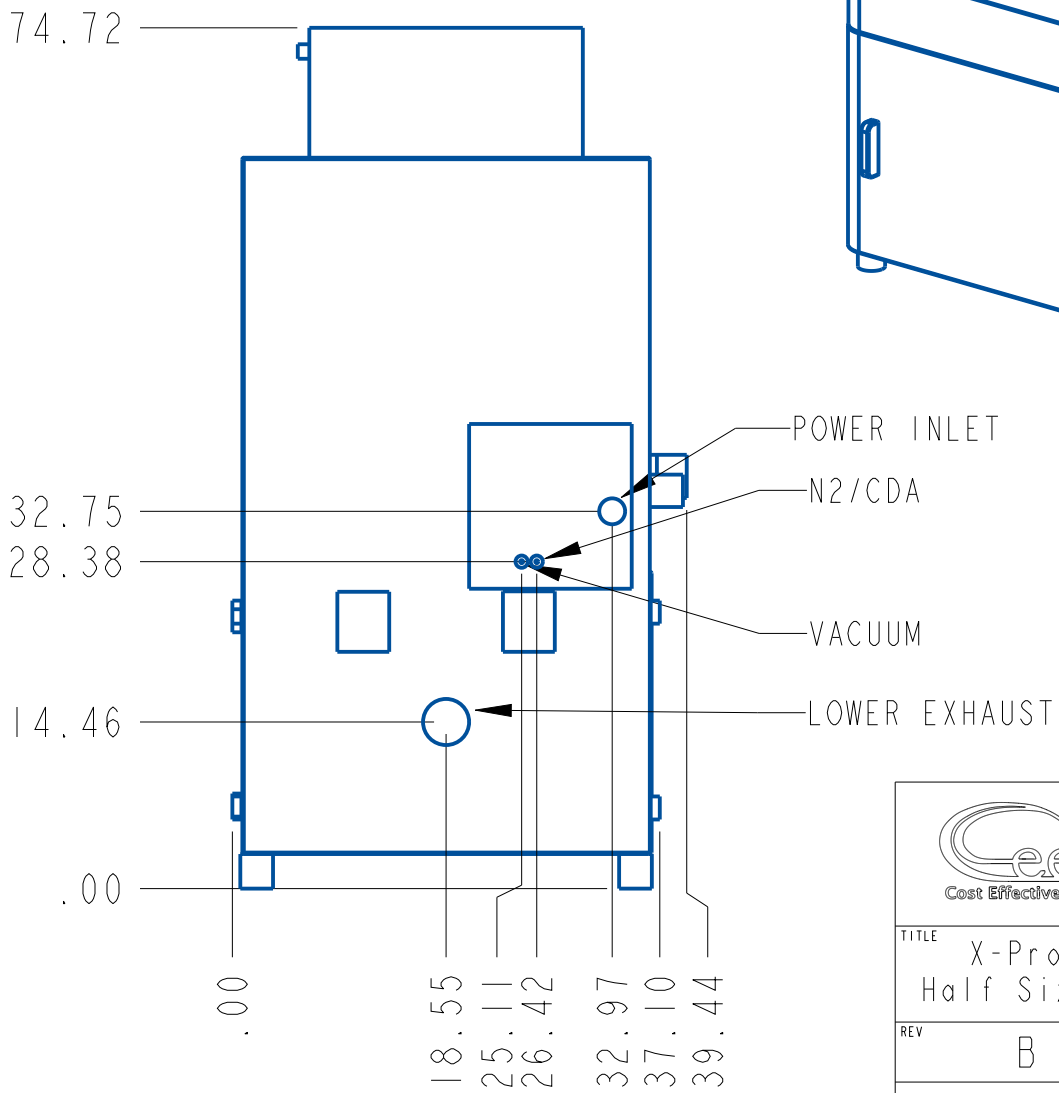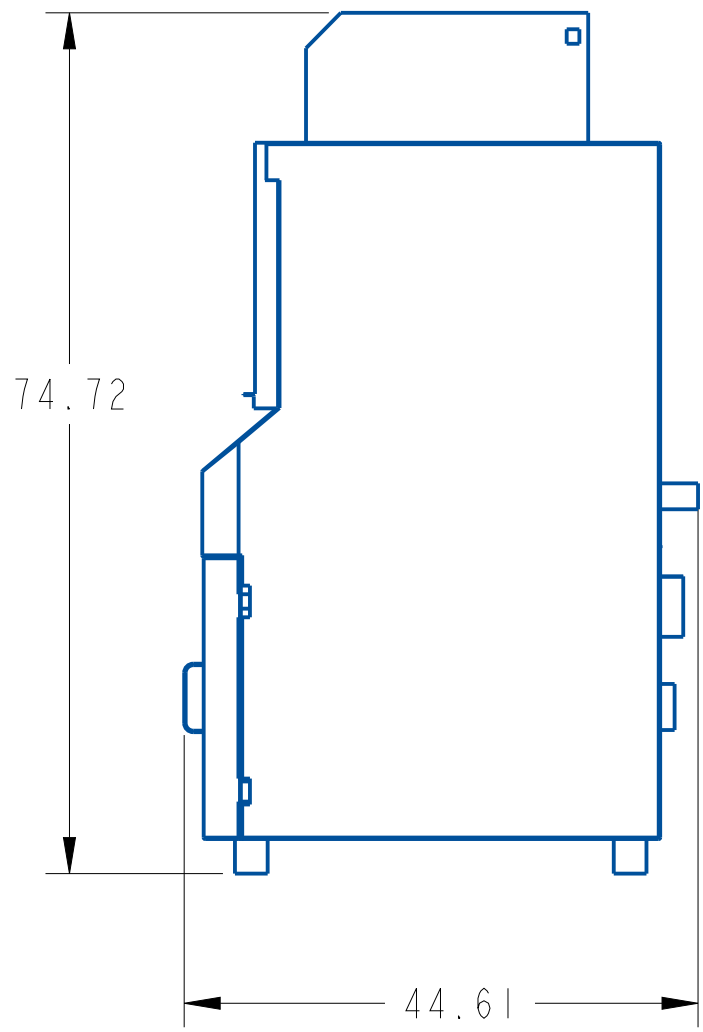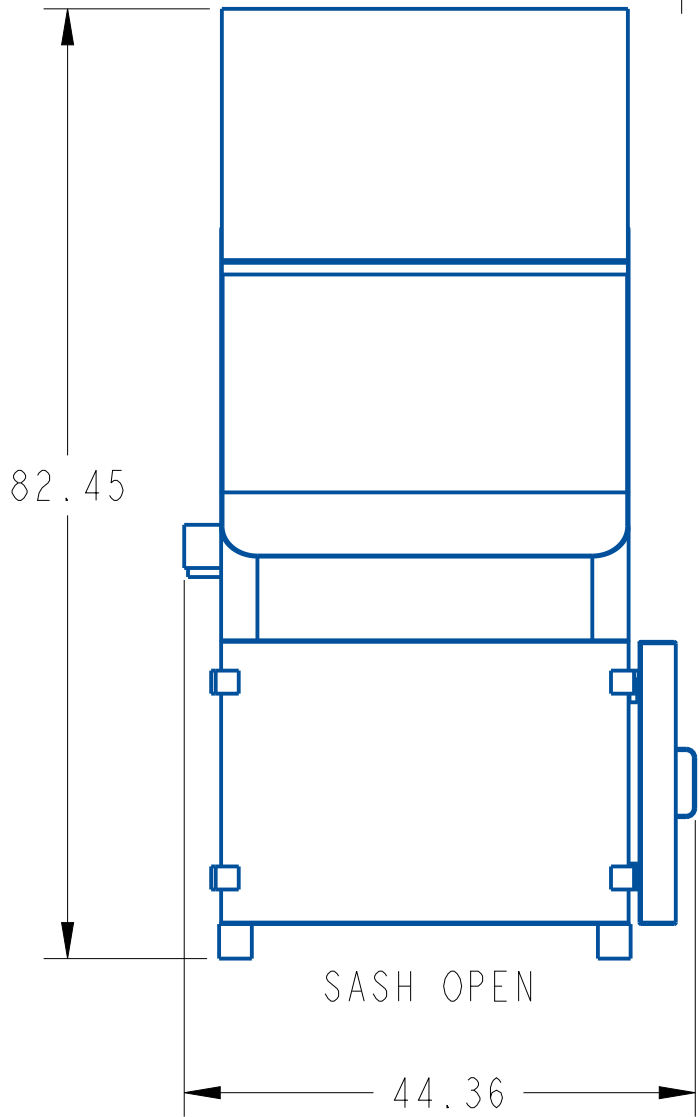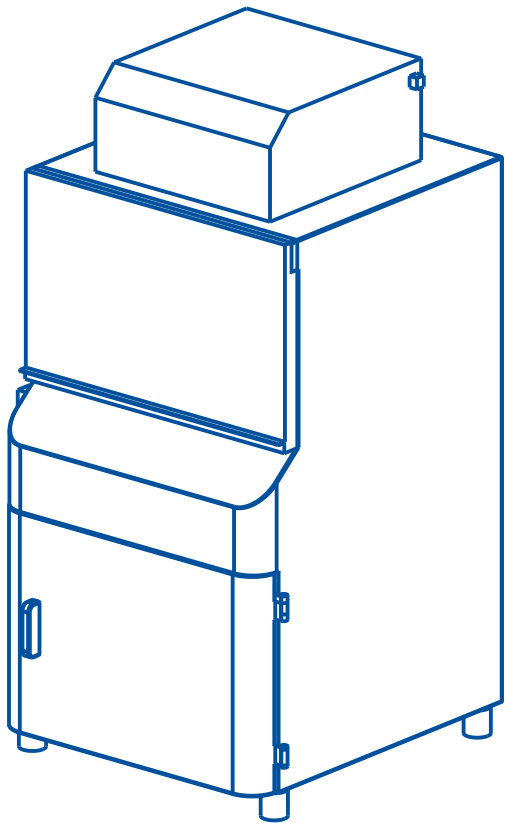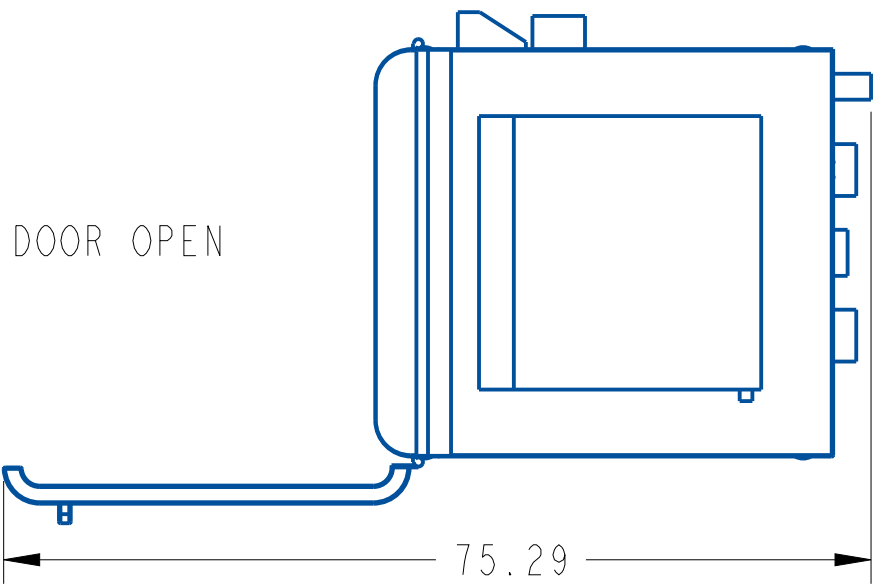

 Cost Effective Equipment		Cost Effective Equipment www.costeffectiveequipment.com	
TITLE X-Pro II Workstation Half Size Ductless Recirc			
REV	B		PART # XPROII-2-DR
ALL DIMENSIONS ARE IN INCHES			