


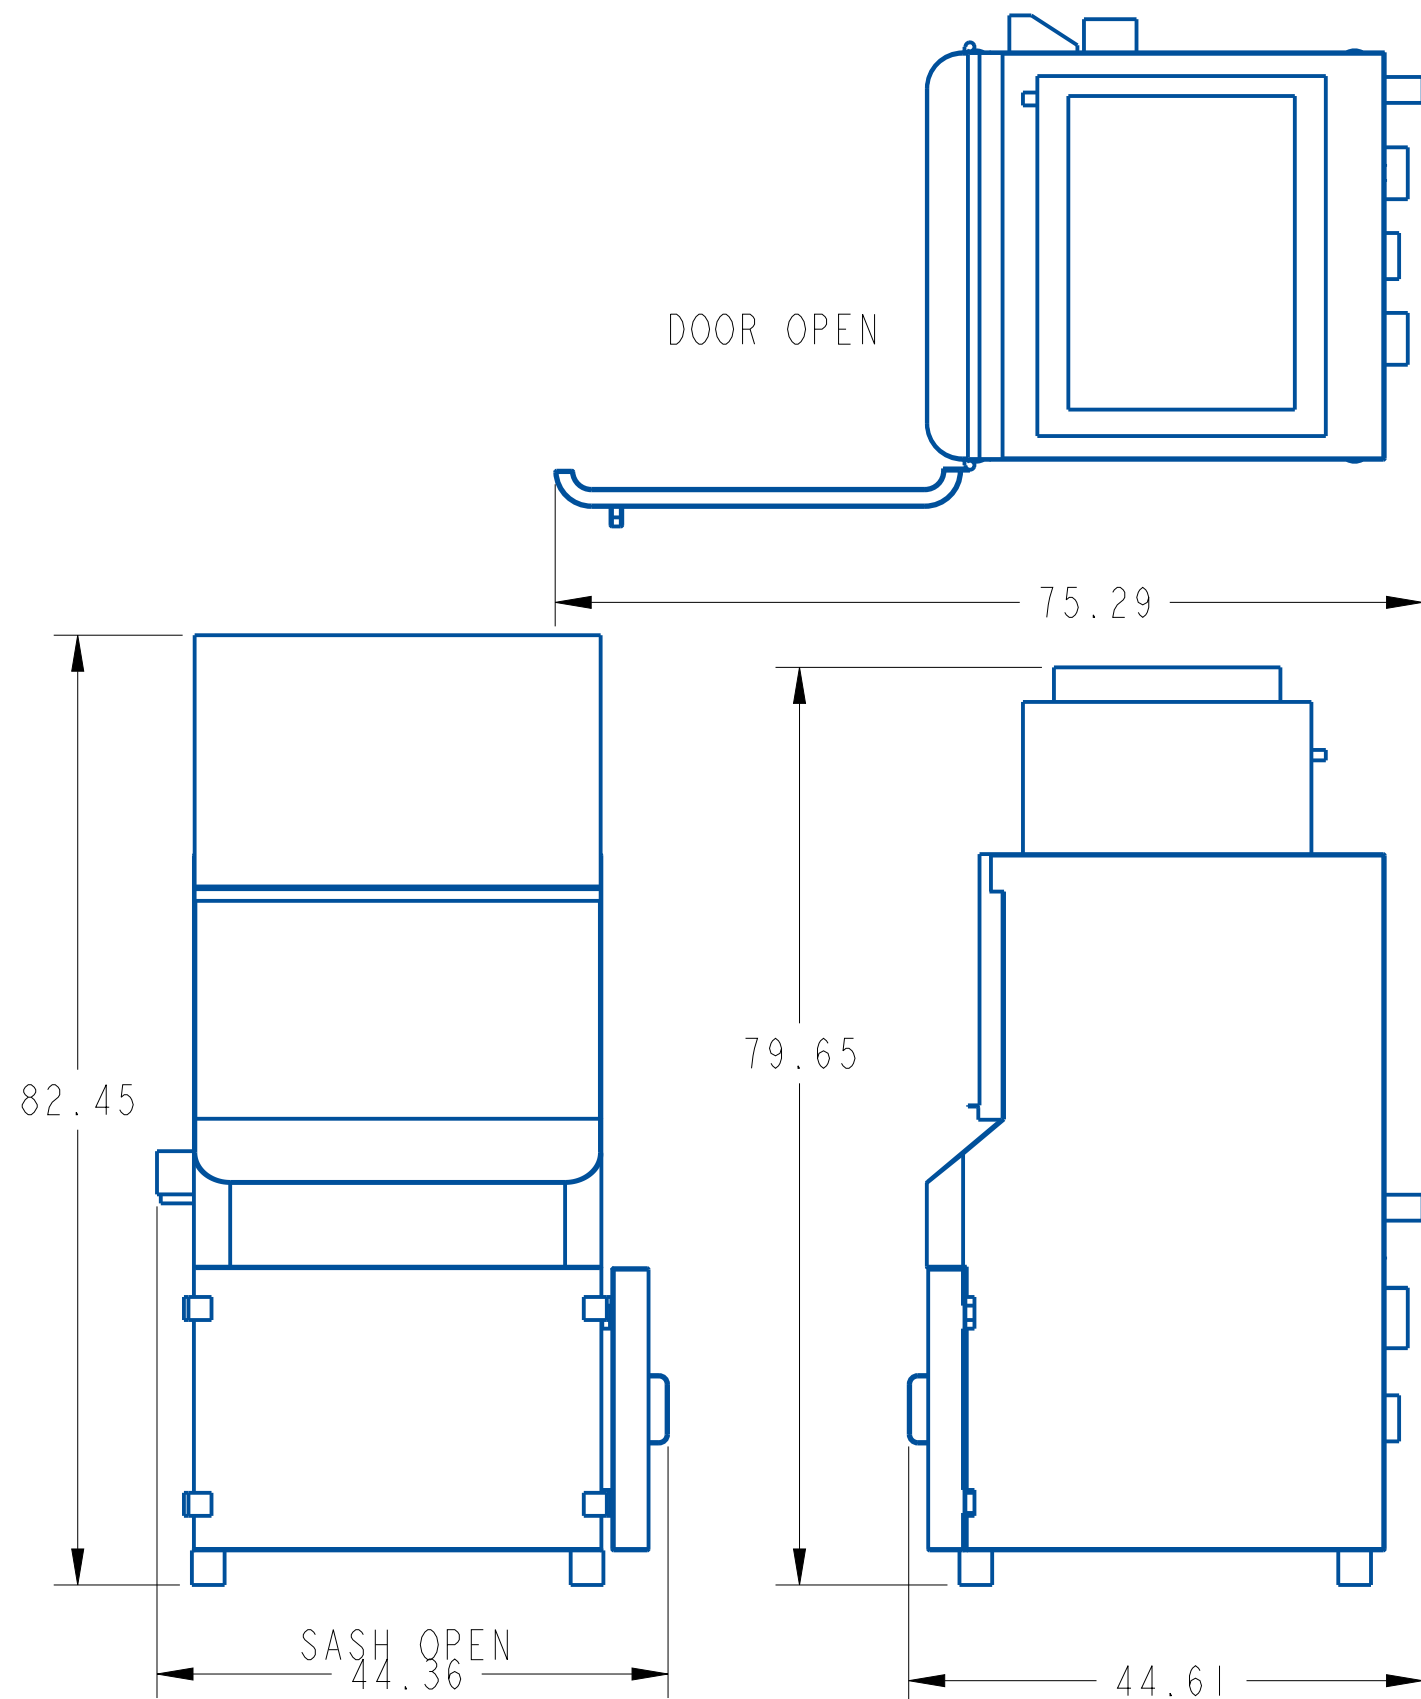

REQUIRED UTILITIES:

ELECTRICAL: 208-230VAC 50/60 HZ SINGLE PHASE, 26.2A MAX


VACUUM*: 20" HG(33kPa) -1/4" PTC OR 1/4" FNPT

*(NOT REQUIRED IF PURCHASED WITH VACUUM PUMPS)

N2/CDA: 70 psi(482kPa)-1/4" PTC OR 1/4" FNPT

CABINET EXHAUST: 4" OD-0.4" H2O @ 20CFM (100Pa @ 34CMH)

NOTE: EACH MODULE WILL HAVE ITS OWN EXHAUST REQUIREMENTS

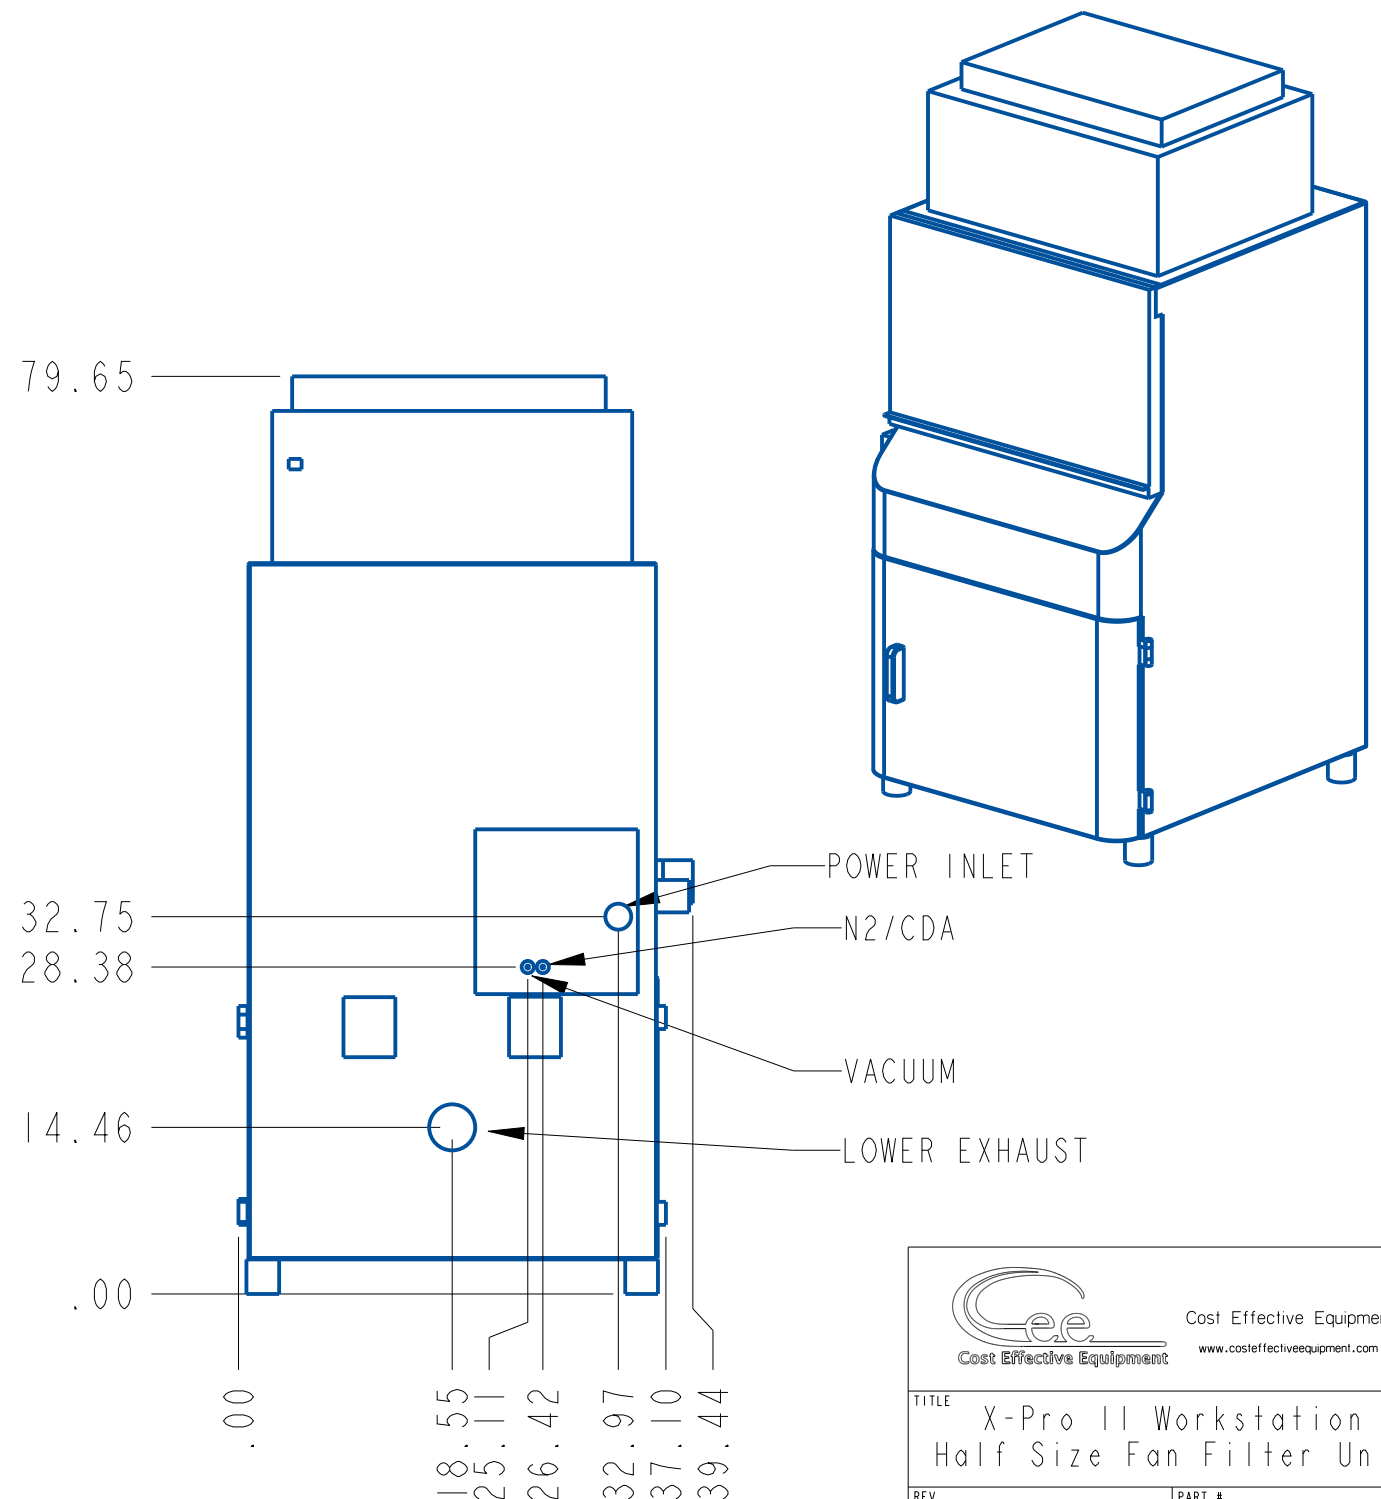

		Cost Effective Equipment www.costeffectveequipment.com	
TITLE		X-Pro II Workstation Half Size Fan Filter Unit	
REV	B	PART #	XPROII-2-FFU
ALL DIMENSIONS ARE IN INCHES			